

防伪可打印超高频挡风玻璃标签

Standard
标准

Tamper Proof Printable UHF Windshield Tag (ETSI FCC)



基本参数/Basic Parameters


| | |
|---------------------------|---|
| 尺寸/Size (L/OD x W/ID x H) | 70*35*0.2mm(ID/OD:圆形标签内径/外径,ID/OD:inner/outer diameter of round tags) |
| 面材封装/FaceStock or Housing | 可打印PP材料/White Printable PP |
| 安装方法/Installation | 胶粘/Adhesive |
| 天线工艺/Antenna Type | 铝天线/Aluminum Antenna |
| 技术/Technology | 平面微带/Microstrip Flat Style |
| 离型纸/Backing Liner | 双面离型透明PET/Dual Silicon & Transparent PET Liner |

特征/Characters 防伪(Tamper Proof)

产品特性/Product Feature


| | |
|--------------------------|---|
| 芯片/Chip Model | Higgs3 |
| 协议/Protocol | ISO18000-6C GEN2 |
| 频率范围/Operating Frequency | 860-960Mhz |
| 内存/Memory | TID/UID 96bit+ EPC/Block 96bit+ User 512bit+ Reserve 32bit access/32bit kill |
| 读距/Reading Range | 500cm (depends on reader) |
| 应用介质/Applicable Surface | 玻璃(Glass) |
| 个性化选项/Option | 定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding |

附加说明/Additional

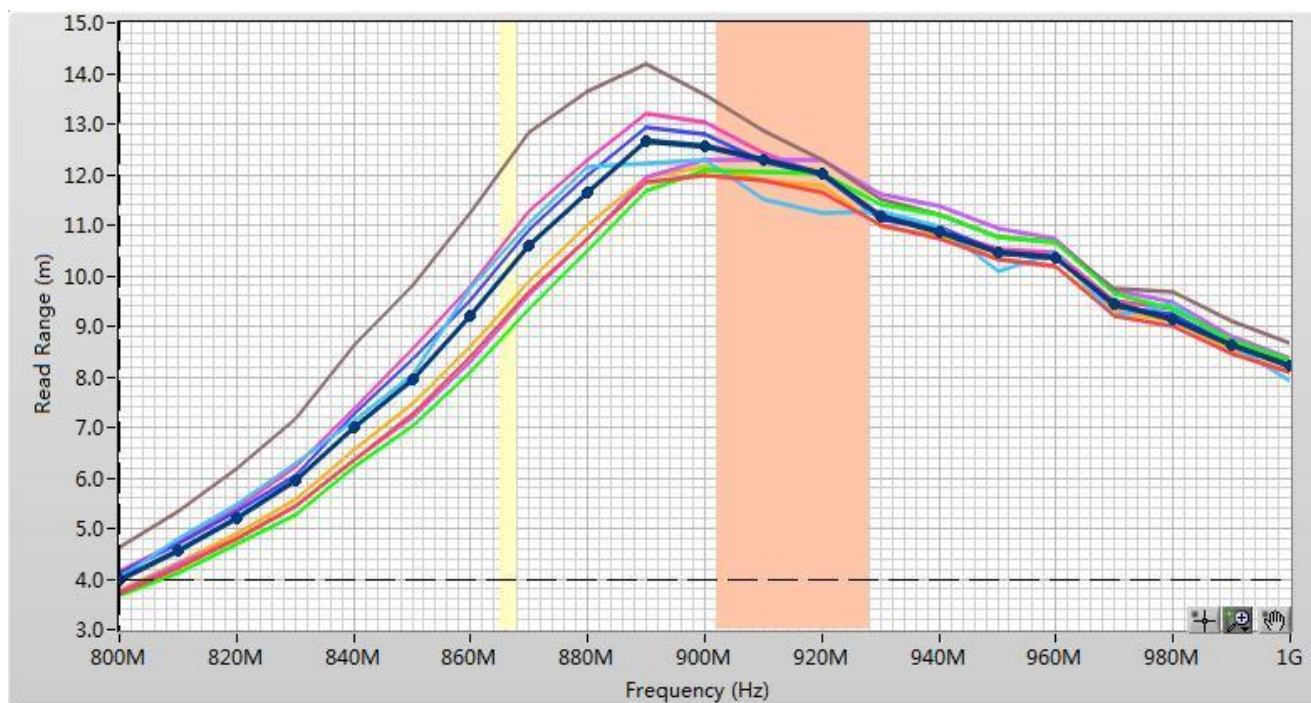

供货方式/Delivery & Supply Format

卷料供货每卷数量1000-3000片(特殊要求见附加说明) Supply in roll with 1000-3000PCS/Roll(Check Additional Note for your specific needs)

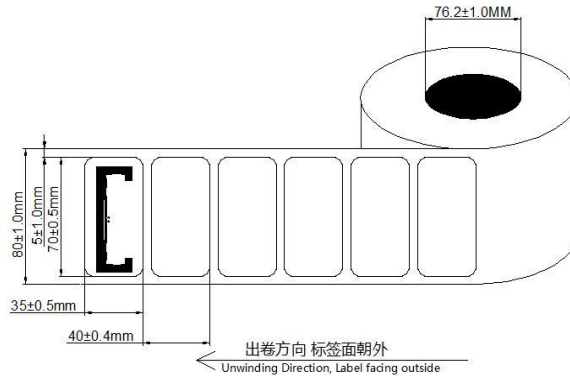

应用场景/Application

车辆ETC系列的电子环保信息认证、高速不停车电子收费、自助停车场、自助加油、车辆自由行、车辆治堵引导、车辆超速等违章管理，车辆简单身份识别，车辆年检追溯管理、车辆保险，车辆金融如租赁和物流供应链数字化仓储、防伪及溯源监管。Widely used in vehicle environment control electronic certificate, ETC unmaned highway toll collection, automatic parking, auto gas/petro fuelling system, vehicle free flow system, transportation traffic control, over speed & vehicle peccancy management, vehicle electronic certificate, vehicle annual inspection management, vehicle insurance, vehicle financing such as car rent and logistic supply chain, digital warehouse, retail, fixed asset management, anti-counterfeit and traceability.



环境参数/Environmental Parameter

| | |
|----------------------------|------------------------------|
| 数据保存/Data EEPROM Retention | 10years |
| 静电保护/ESD Limited Voltage | 2KV |
| 工作温度/Operating Temperature | -35℃ - 85℃ |
| 储存温度/Storage Temperature | 0℃ - 25℃ |
| 操作湿度/Relative Humidity | 10%-95%(Variant Performance) |

兼容打印机/Compatible Printers

| | |
|------------|-------------|
| 佐藤/SATO | CL4NX PLUS |
| 斑马/Zebra | ZT411RFID |
| 博思得/POSTEK | TX Series |
| 东芝/TOSHIBA | SX-4T SX-5T |

声明/STATEMENT

上述数据是基于本公司对产品特性的一般了解，仅供一般信息参考。客户购买本产品时应在实际应用条件下测试结果来自行决定是否适用。英诺尔向购买者保证其产品材料和工艺上没有不良。The above data is based on our company general understanding of the product attribute, is just for general reference. Buyer should evaluate product under the condition of practical application to decide whether it is suitable for your application. XMinnov guarantee their products to the buyers that there is no defect on product material and fabrication.

批准Approved By: 张琼勇 制作审核Prepared & Checked By: 郑晶
 日期Date: 2021/12/24 日期Date: 2021/12/24